


Optical Fiber Splitter

TECHNICAL DATA SHEET

1 x 2 PLC Fiber Splitter, Mini Module, 900µm, LC/APC, Single Mode

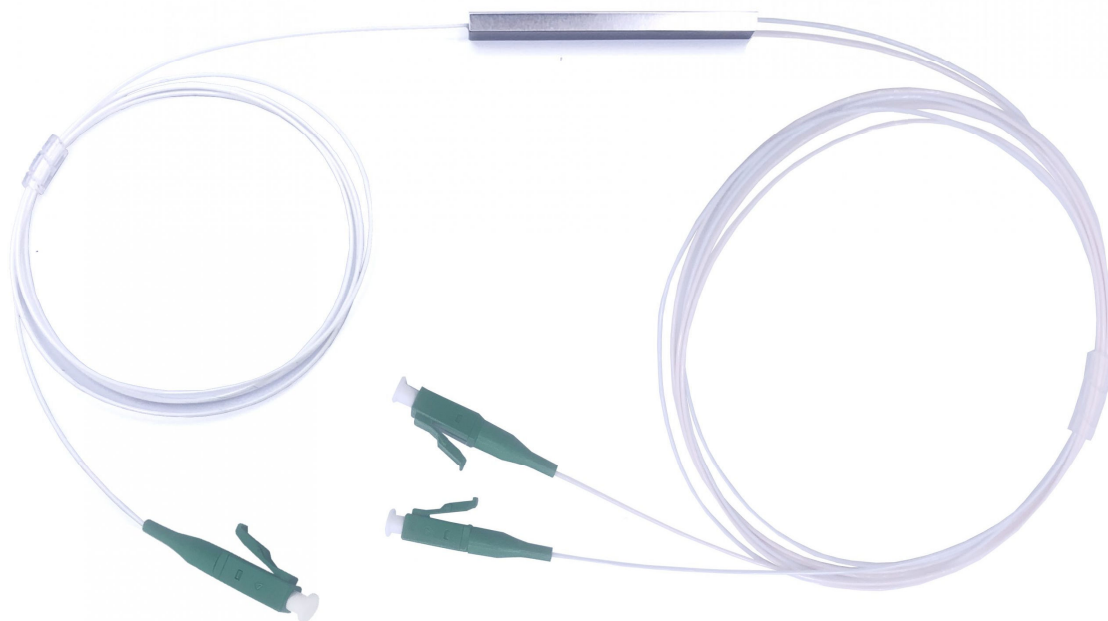

1X 2 PLC Fiber Splitter, Mini Module, 900μm, LC/APC, Single Mode

Product Description

The 1 × 2 PLC Fiber Splitter (Mini Module) is a passive optical component based on Planar Lightwave Circuit (PLC) technology, designed to split one optical input signal into two output fibers with stable and uniform optical power distribution.

The splitter is housed in a compact mini module enclosure with 900μm tight-buffered fibers and terminated with LC/APC connectors, providing a space-saving and high-performance solution for FTTH, FTTx, PON, and telecommunications networks.

Features:

- 1 × 2 optical splitting ratio
- PLC (Planar Lightwave Circuit) technology
- Mini module compact design
- 900μm tight-buffered fiber construction
- LC/APC connectorized ends
- Low insertion loss and high reliability
- Excellent channel uniformity
- Low polarization dependent loss (PDL)
- Wide operating wavelength range (1260–1650 nm)
- Plug-and-play installation
- RoHS compliant
- Telcordia GR-1209 / GR-1221 qualified

Application:

- FTTH (Fiber to the Home) networks
- FTTx access networks
- GPON / EPON systems
- Passive Optical Networks (PON)
- Optical Distribution Frames (ODF)
- Fiber Distribution Boxes (FDB)
- CATV systems
- Data communication networks


Optical Specifications

Parameter	Value
Configuration	1 × 2
Operating Wavelength	1260 ~ 1650 nm
Insertion Loss (Max)	≤ 4.0 dB
Uniformity	≤ 0.6 dB
Return Loss	≥ 60 dB
Polarization Dependent Loss (PDL)	≤ 0.2 dB
Directivity	≥ 55 dB
Wavelength Dependent Loss (WDL)	≤ 0.3 dB
Repeatability	≤ 0.1 dB
Stability	≤ 0.2 dB

Mechanical Specifications

Item	Specification
Package Type	Mini Module
Fiber Type	Single Mode OS2
Fiber Diameter	900μm Tight Buffer
Connector Type	LC/APC
Housing Material	ABS / Metal Mini Module
Input/Output Length	1.0 m (Typical, customizable)
Operating Temperature	-40°C ~ +85°C

Uniform distribution of the optical signal

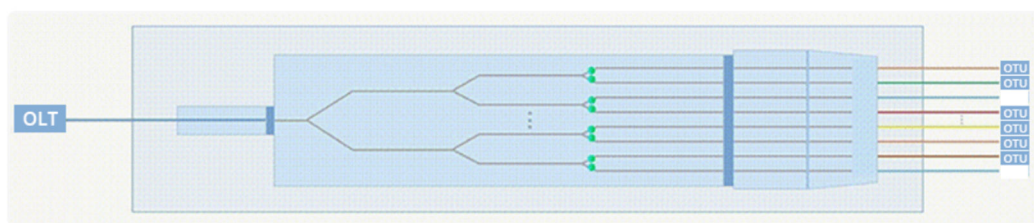

Widely used in FTTX projects and data communication centers

