

## Optical Fiber Splitter

### TECHNICAL DATA SHEET

**1 x 32 PLC Fiber Splitter, Splice ABS  
Module, 2.0mm, SC/APC, Singlemode**



## **1 x 32 PLC Fiber Splitter, Splice/Pigtailed ABS Module, 2.0mm, SC/APC, Singlemode**

### **Product Description**

The 1 × 32 PLC Fiber Splitter (ABS Splice/Pigtailed Type) is a passive optical component based on Planar Lightwave Circuit (PLC) technology, designed to split one optical input signal into eight outputs with stable and uniform optical power distribution.

It is packaged in a rugged ABS splice-type module with 2.0mm pigtail fibers terminated with SC/APC connectors, making it suitable for FTTH access networks, fiber distribution boxes (FDB), and optical distribution frames (ODF). It supports field splicing or direct termination, offering flexibility for installation environments.

### **Features:**

- 1 × 32 optical splitting ratio
- PLC (Planar Lightwave Circuit) technology
- ABS module housing for protection
- 2.0mm pigtail fiber construction
- SC/APC connectorized ends
- Low insertion loss and high stability
- Excellent channel uniformity
- Wide operating wavelength range (1260–1650 nm)
- Strong mechanical durability for field use
- RoHS compliant
- Telcordia GR-1209 / GR-1221 qualified design

**Application:**

- FTTH (Fiber to the Home) networks
- GPON / EPON systems
- Fiber Distribution Boxes (FDB)
- Optical Distribution Frames (ODF)
- CATV networks
- Telecom access networks
- Data communication systems


**Optical Specifications**

Parameter	Value
Configuration	1 × 32
Operating Wavelength	1260 ~ 1650 nm
Insertion Loss (Max)	≤ 7.2 dB
Uniformity	≤ 0.8 dB
Return Loss	≥ 60 dB (APC)
Polarization Dependent Loss (PDL)	≤ 0.2 dB
Directivity	≥ 55 dB
Wavelength Dependent Loss (WDL)	≤ 0.3 dB
Repeatability	≤ 0.1 dB
Stability	≤ 0.2 dB

## Mechanical Specifications

Item	Specification
Package Type	ABS Module
Fiber Type	Single Mode OS2
Fiber Diameter	2.0 mm Pigtail
Connector Type	SC/APC
Housing Material	ABS Plastic Enclosure
Input/Output Length	1.0 m (Typical, customizable)
Operating Temperature	-40°C ~ +85°C

## Uniform distribution of the optical signal

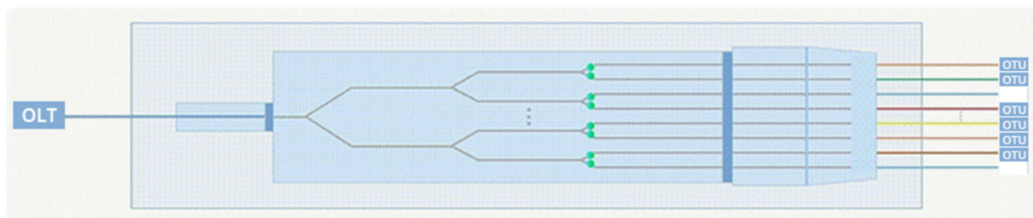

## Widely used in FTTX projects and data communication centers

