


Optical Fiber Splitter

TECHNICAL DATA SHEET

1 x 4 PLC Fiber Splitter, Mini Module, 900µm, LC/APC, Single Mode

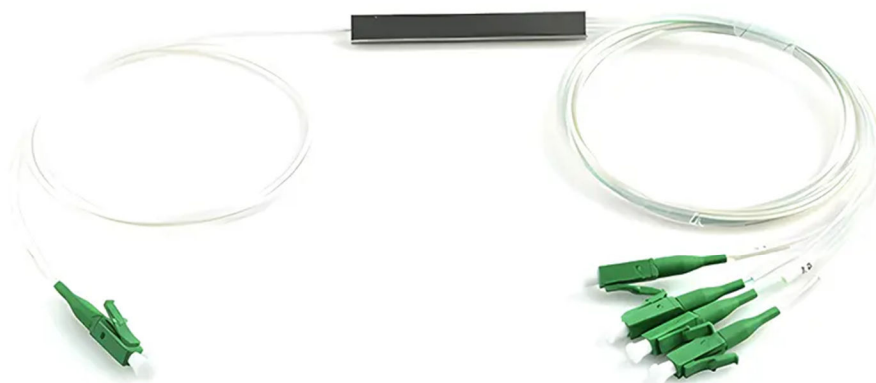

1X 4 PLC Fiber Splitter, Mini Module, 900μm, LC/APC, Single Mode

Product Description

The 1 × 4 PLC Fiber Splitter (Mini Module) is a passive optical device based on Planar Lightwave Circuit (PLC) technology, designed to split one optical input signal into four output ports with stable and uniform optical power distribution.

It is housed in a compact mini module enclosure using 900μm tight-buffered fibers and terminated with LC/APC connectors, making it suitable for FTTH access networks, fiber distribution frames (ODF), and fiber distribution boxes (FDB). It provides low insertion loss, high reliability, and excellent long-term environmental performance.

Features:

- 1 × 4 optical splitting ratio
- PLC (Planar Lightwave Circuit) technology
- Mini module compact design
- 900μm tight-buffered fiber construction
- LC/APC connectorized ends
- Low insertion loss and high reliability
- Excellent channel uniformity
- Low polarization dependent loss (PDL)
- Wide operating wavelength range (1260–1650 nm)
- Plug-and-play installation
- RoHS compliant
- Telcordia GR-1209 / GR-1221 qualified

Application:

- FTTH (Fiber to the Home) networks
- FTTx access networks
- GPON / EPON systems
- Passive Optical Networks (PON)
- Optical Distribution Frames (ODF)
- Fiber Distribution Boxes (FDB)
- CATV systems
- Data communication networks


Optical Specifications

Parameter	Value
Configuration	1 × 4
Operating Wavelength	1260 ~ 1650 nm
Insertion Loss (Max)	≤ 7.2 dB
Uniformity	≤ 0.8 dB
Return Loss	≥ 60 dB
Polarization Dependent Loss (PDL)	≤ 0.2 dB
Directivity	≥ 55 dB
Wavelength Dependent Loss (WDL)	≤ 0.3 dB
Repeatability	≤ 0.1 dB
Stability	≤ 0.2 dB

Mechanical Specifications

Item	Specification
Package Type	Mini Module
Fiber Type	Single Mode OS2
Fiber Diameter	900μm Tight Buffer
Connector Type	LC/APC
Housing Material	ABS / Metal Mini Module
Input/Output Length	1.0 m (Typical, customizable)
Operating Temperature	-40°C ~ +85°C

Uniform distribution of the optical signal

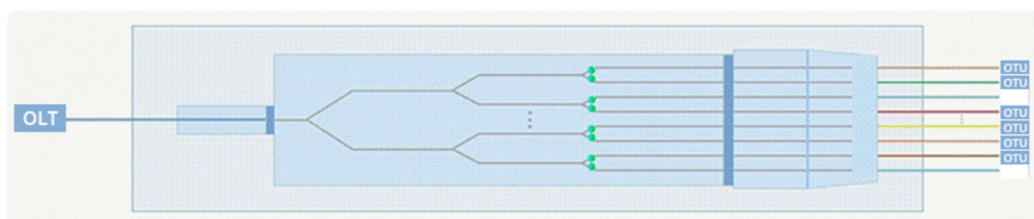

Widely used in FTTX projects and data communication centers

