

Horizontal Fiber Optic Splice Closure CH004


Optical Fiber Splice Closure

TECHNICAL DATA SHEET



Product Description:

FL-CH004 has 6 fiber cable in-out round ports for the cable diameter $\Phi 13$ - $\Phi 15$ mm entry. It is widely applied to the splicing and distributing variable optical cables. It is made of high-quality ABS plastic and with the mechanical seal structure filled with the seal material. The external component and fastening piece are all made of the high-quality steel. It can be opened after sealing and can be reused without changing sealing material, with silicone rubber insulation tape.

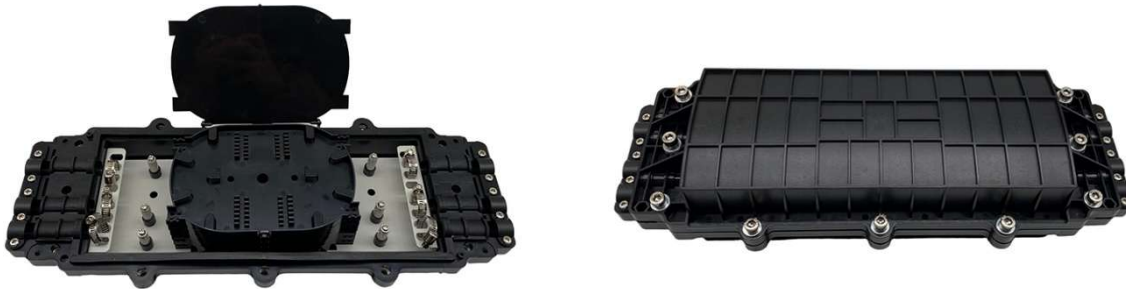

Applications:

- Wall-mounted installations
- Aerial hanging installations

Technical Specifications:

Parameter	Specification
Dimensions	466.5x179.8x120.6
Weight	2.7 kg
Cable diameter	Φ3 – Φ15 mm
cable entry ports	3 in 3 out
Max Capacity of splice tray	6
Max Capacity	72 (single layer tube) 144 (double layer tube)
Sealing structure	silicon gum material or sticky cincture
Fiber Capacity per Tray	12 core / tray or 24 core (duplex)
Maximum Fiber Capacity	120 fibers
Re-enterable	Yes



Accessories

- Splice protector sleeve
- Silicon gum material
- Sticky cincture
- Cable ties
- Sealing washer
- Allen wrench
- Insulated rubber belt
- Reusable mechanical sealing design
- Supports multiple splice trays