


Optical Fiber Patch Cord

TECHNICAL DATA SHEET


LSZH Fiber Optic Patch Cord MM (OM2) 50/125 LC-UPC/SC-UPC Duplex 3.0 mm

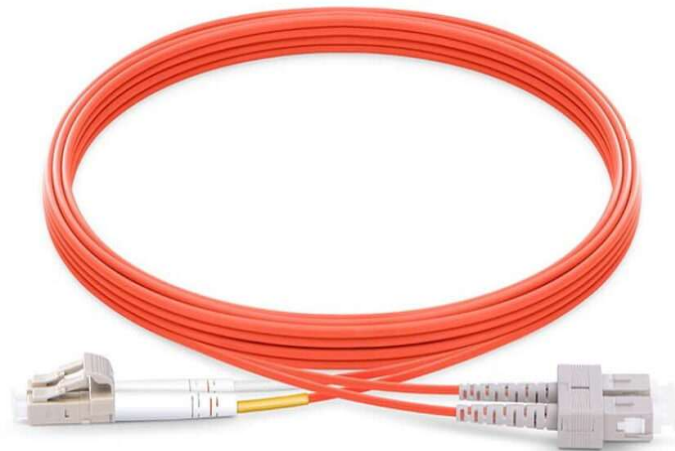

LSZH Fiber Optic Patch Cord MM (OM2) 50/125 LC-UPC/SC-UPC Duplex 3.0 mm

Product Description:

The LSZH Fiber Optic Patch Cord Multimode OM2 (50/125 μm) with LC/UPC to SC/UPC connectors, in a duplex 3.0 mm construction, is designed for reliable optical connectivity in LAN, data communication, telecommunications, and fiber distribution networks.

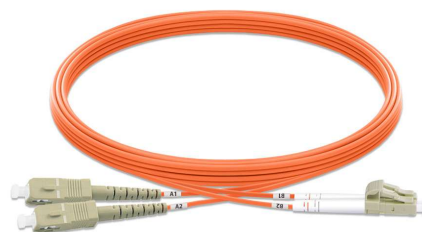

It utilizes OM2 50/125 μm multimode optical fiber, providing reliable transmission performance for multimode network applications. The LC/UPC and SC/UPC connectors provide accurate fiber alignment, stable coupling, and reliable optical performance.

The duplex cable contains two optical fibers, allowing simultaneous bidirectional communication. The LSZH (Low Smoke Zero Halogen) jacket provides enhanced safety for indoor installations by reducing smoke and halogen emissions in the event of fire.

The 3.0 mm cable construction provides good mechanical protection and durability for patching and equipment interconnection.

Features:

- Multimode OM2 50/125 μm fiber
- Compliant with applicable IEC 60793-2-10 standards
- LC/UPC to SC/UPC connector configuration
- Duplex, 2-fiber construction
- 3.0 mm outer diameter
- LSZH Low Smoke Zero Halogen jacket
- Low insertion loss
- High return loss

- High-precision ceramic ferrules
- Reliable and stable connector coupling
- Factory terminated and tested
- Suitable for indoor fiber optic installations
- Compatible with multimode networking equipment

Fiber Specifications:

Specification	Value
Fiber Type	Multimode (MM)
Fiber Category	OM2
Fiber Size	50/125 μm
Core Diameter	50 μm
Cladding Diameter	125 μm
Fiber Count	2 Fibers
Configuration	Duplex
Operating Wavelengths	850 nm / 1300 nm
Attenuation @ 850 nm	$\leq 3.5 \text{ dB/km}^*$
Attenuation @ 1300 nm	$\leq 1.5 \text{ dB/km}^*$
Bandwidth @ 850 nm	$\geq 500 \text{ MHz}\cdot\text{km}^*$
Bandwidth @ 1300 nm	$\geq 500 \text{ MHz}\cdot\text{km}^*$
Fiber Standard	IEC 60793-2-10

Cable Specifications

Specification	Value
Cable Type	Duplex
Number of Fibers	2
Cable Diameter	3.0 mm
Jacket Material	LSZH
Jacket Type	Low Smoke Zero Halogen
Jacket Color	Orange
Strength Member	Aramid Yarn
Fiber Type	Multimode OM2
Fiber Size	50/125 μ m

Connector Specifications

Specification	Side A	Side B
Connector Type	LC/UPC	SC/UPC
Polish Type	UPC	UPC
Ferrule	Ceramic	Ceramic
Configuration	Duplex	Duplex
Fiber Count	2	2

Optical Performance

Parameter	Specification
Insertion Loss	≤ 0.30 dB*
Return Loss	≥ 35 dB*
Connector Polish	UPC
Optical Testing	100% Factory Tested

Mechanical & Environmental Specifications

Parameter	Specification
Operating Temperature	-20°C to +60°C
Storage Temperature	-40°C to +85°C
Jacket Material	LSZH
Outer Diameter	3.0 mm
Cable Construction	Duplex
RoHS	Compliant

Applications

- LAN Networks
- Data Communication Networks
- Telecommunications
- Data Centers
- Optical Distribution Frames (ODF)
- Fiber Patch Panels
- Building Backbone Networks
- Fiber Optic Equipment Interconnection
- Multimode Ethernet Networks
- Indoor Fiber Optic Cabling