



OPTICAL FIBER CABLETECHNICAL DATA SHEETDUCT- DIRECT BURIED CABLECENTRAL TUBE CONSTRUCTIONSDOUBLE STEEL WIRE AND STEEL TAPE WITH RIP CORDANTI-CORROSION AND UV RESISTANCE CABLEWATER PROTECTED - RODENT PROTECTED - ANTI-TERMITE8 Fibers, Multimode 50/125 μ m**A-DQ(ZN)(SR)2Y 1X08 G50/125 CT**

International Code: A-DQ(ZN)(SR)2Y 1X08 G50/125 CT

Cable Application

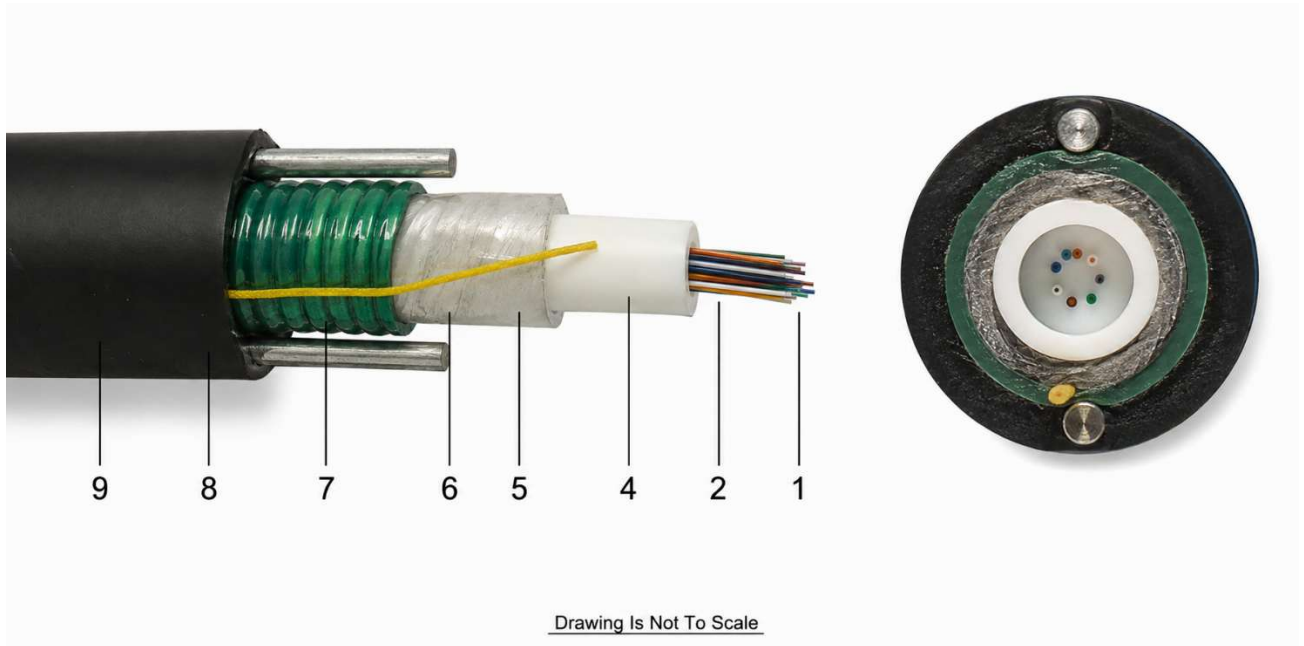

Cable can be designated as duct-buried (metallic) rodent protected cable. Cable can be installed by pulling in duct or buried or on cable trays. Fiber optic cables are used for triple-play (Voice-video-data), FTTx applications in telecommunication projects, long-haul, backbone, metropolitan, broadband, utility and intelligent traffic control, supervisory control and data acquisition (SCADA), cable TV (CATV), military, etc.

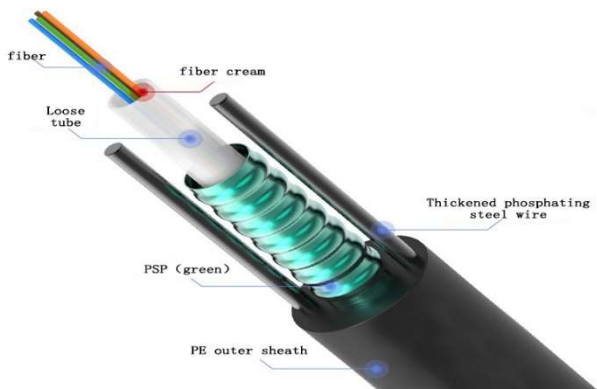

Cable Construction

Item	Cable Element	Cable Construction
1	Fibers	8F, Multimode Fiber, 50/125 μ m
2	Dielectric central strength member	FRP (Fiber Reinforced Plastic)
3	Loose Tube (Jelly Filled)	PBTP material, with 4 Fiber loose tube
4	Water Blocking elements	Water Blocking Yarns for water blocking along core
5	Core Wrapping (Longitudinal)	Water Blocking tape wrapped over SZ stranded core with binder
6	Metallic Steel Strength Members	Longitudinal two steel wire serving as extra strength
7	Metallic Steel Tape Armoring	ECCS, Corrugating steel tape for rodent/mechanical protection
8	Outer Polyethylene Sheath	HDPE, 1.8 mm nominal thickness, Black Color and UV Resistant
9	Method of Cable Marking	Hot Foil Stamping with White tape
-	Ripcord	Two Polyester Ripcords under steel tape for easy sheathing removal
-	Outer Cable Diameter	12.0 mm (Approx.)
-	Cable Weight	143 kg/km (Approx.)
-	Mechanical Requirements	Maximum Tensile Strength – 2000N / Crush Strength – 1000N*
-	Minimum Bending Radius	During installation = $20 \times \text{Cable OD} = 240 \text{ mm}$ / Installed cable = $15 \times \text{Cable OD} = 180 \text{ mm}$

International Code: A-DQ(ZN)(SR)2Y 1X08 G50/125 CT

Cable Design

Outdoor cable - Fibers bundles, Jelly filled central tube wrapped by water blocking tape, core wrapped by tape, two steel wires diametrically opposite to each other serving as extra strength and anti-buckling members, corrugating steel tape for rodent & mechanical protection and outer sheath of high density Polyethylene (UV resistant)



Cable Application Standards

- IEC 60793 – Optical Fibers
- IEC 60794 – Optical Fiber Cables
- IEC 60794-3 – Outdoor Optical Fiber Cables
- IEC 60793-2-10 – Multimode Optical Fiber

Fiber Colors

FIBER COLOR (1-6Fibers)	BLUE	ORANGE	GREEN	BROWN	Grey	White
FIBER COLOR (7-12Fibers)	Red	Black	-	-	-	-

Cable Marking

FiberLight 8F MM Fiber Optic Outdoor Double Armored Cable – OM4 50/125 μ m, IEC 60793, IEC 60794-1-2, XXXX Meter Marking

International Code: A-DQ(ZN)(SR)2Y 1X08 G50/125 CT

Optical Fiber

Multimode optical fibers made of a silica core, silica cladding and dual layer of acrylate coating over the cladding. Coloring is applied over the coating for easy identification. The fibers are 50/125 μm graded-index multimode fibers, complying with IEC 60793-2-10

Structural Specification

Parameter	Specification
Core Diameter	$50.0 \pm 2.5 \mu\text{m}$
Cladding Diameter	$125.0 \pm 1.0 \mu\text{m}$
Coating Diameter (Colored)	$245 \pm 15 \mu\text{m}$
Core/Cladding Concentricity Error	$\leq 1.5 \mu\text{m}$
Cladding Non-Circularity	$\leq 1.0 \%$
Numerical Aperture	0.200 ± 0.015

Optical Specification

Parameter	Specification
Attenuation @ 850 nm	$\leq 3.0 \text{ dB/km}$
Attenuation @ 1300 nm	$\leq 1.0 \text{ dB/km}$
Bandwidth @ 850 nm	$\geq 500 \text{ MHz}\cdot\text{km}$
Bandwidth @ 1300 nm	$\geq 500 \text{ MHz}\cdot\text{km}$
Maximum Theoretical Bandwidth	According to IEC 60793-2-10
Operating Wavelength	850 / 1300 nm

Mechanical Specification

Parameter	Specification
-----------	---------------

Proof Test	$\geq 1.0 \%$
------------	---------------

Optical Specification

Attenuation @ 1310 nm / 1550 nm	$\leq 0.35 \text{ dB/km} / \leq 0.22 \text{ dB/km}$
Dispersion @ 1285 – 1330nm / 1550nm	$\leq 3.5 \text{ PS/(nm.km)} / \leq 18.0 \text{ PS/(nm}^2\text{ukm)}$
Zero dispersion wavelength (λ_0)	$1300 \leq \lambda_0 \leq 1324 \text{ nm}$
Zero dispersion slope (So)	$S_o \leq 0.092 \text{ PS/(nm}^2\text{ukm)}$
Polarization mode dispersion	$\leq 0.2 \text{ PS}/\sqrt{\text{km}}$
Cable cut-off wavelength (λ_{cc})	$\lambda_{cc} \leq 1260 \text{ nm}$
Point Discontinuity @ 1310/1550nm	$\leq 0.2 \text{ dB}$
Effective group index of refraction (Neff)	1.4675 @ 1310nm / 1.4681 @ 1550nm

International Code: A-DQ(ZN)(SR)2Y 1X08 G50/125 CT

Technical Characteristics for Optical Fiber Cable

Tests	Specification	Conditions	Acceptance Criteria
Temperature cycle	IEC 60794-1-F1	-20 C to +70 C, 1hr 2 cycle	Attenuation change $\leq \pm 0.1$ dB/km
Tensile Strength	IEC 60794-1-E1A	Max 3000 N; 10min	Attenuation change $\leq \pm 0.1$ dB/km
Crush	IEC 60794-1-E3	3000 N/100mm; 10min.	Attenuation change $\leq \pm 0.1$ dB/km
Impact	IEC 60794-1-E4	3 spot, 1m, 1kg	Attenuation change $\leq \pm 0.1$ dB/km
Cable Bend Radius	IEC 60794-1-E11	15 $\times$ OD, No Load	Attenuation change $\leq \pm 0.1$ dB/km
Repeated Bending	IEC 60794-1-E6	20 x OD, 1kg, 2 cycle	Attenuation change $\leq \pm 0.1$ dB/km
Twist	IEC 60794-1-E7	2m, 2kg, 180°, 5 cycle	Attenuation change $\leq \pm 0.1$ dB/km
Kink	IEC 60794-1-E10	15 x OD	No defect on fiber and sheath
WPT	IEC 60794-1-F5B	L=3mt, H=1mt, T=24hrs	No water leakage

Environmental Properties for Optical Fiber Cable

Relative Humidity	5% to 95%
Operating Temperature	-40°C to +70°C
Installation/Transportation/Storage	-20°C to +65°C

Optical Properties for Optical Fiber Cable

Average Attenuation @1310nm	≤ 0.4 dB/km
Average Attenuation @1550nm	≤ 0.3 dB/km
Chromatic Dispersion @ 1285-1330nm	≤ 3.5 ps/nm.km
Chromatic Dispersion @ 1550nm	≤ 18 ps/nm.km

PMD (Maximum for each individual fiber)	$\leq 0.2\text{ps}/\sqrt{\text{km}}$
---	--------------------------------------

International Code: A-DQ(ZN)(SR)2Y 1X08 G50/125 CT

Standard Cable Length

Standard Cutting Length: 3000mts $\pm$ 10%

Drum Marking

All necessary cable information shall be marked on the wooden drum outer flanges by using water proof Ink or water proof label or aluminum plate.

Packing and Shipping

The cable wooden drum shall be of the standard manufacturing length but special length if any can also be provided on customer request. The wooden drum barrel diameter shall not be less than 50 times of the nominal outer diameter of the cable. The cable ends shall be sealed with shrinkable end caps on both sides of the cable. The cable wooden drum is protected by whether proof sheet and wooden battens. The direction of rotation shall be marked on the drum flange.

Cable Features

The Cable Lifetime more than 30 years.

